




# OWNER'S MANUAL TALON II SAFETY HOOK #512

## WARNING



**Straight Pull Only**

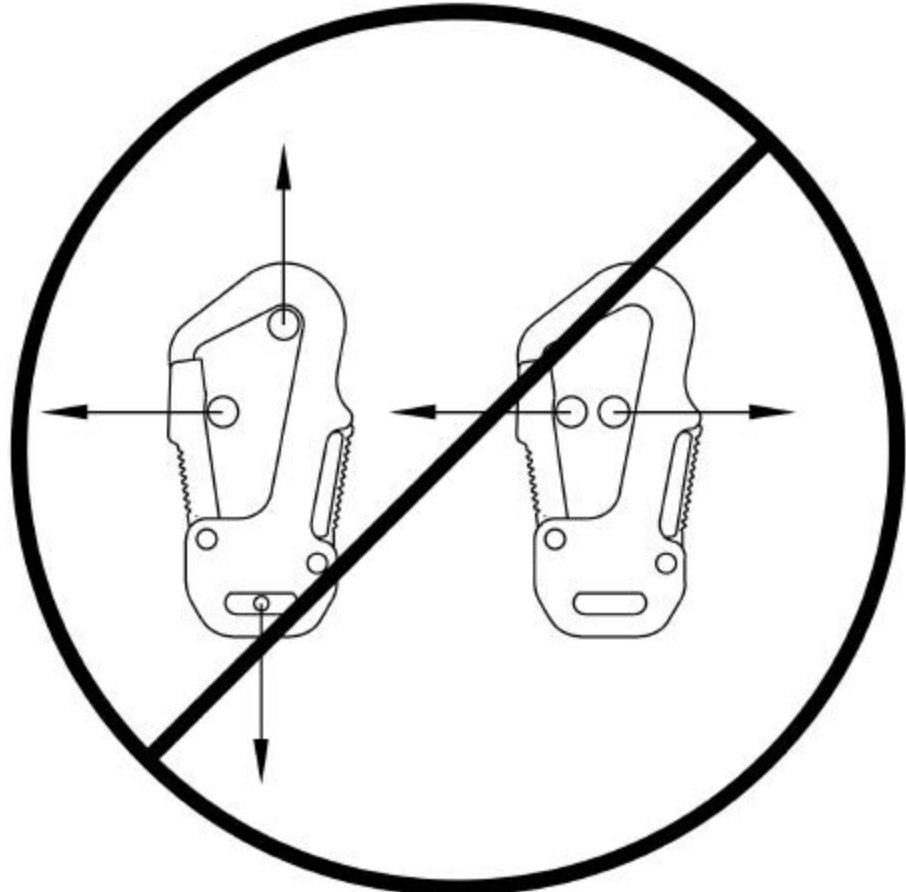

**No Side Loads**

### **Maximum Safe Working Load: 3000 lbs**

The Talon II Safety Hook by Lifesaving Systems has been designed with a safety lock mechanism for the gate to prevent inadvertent load release. To open the gate press inward on the latch located on the spine of the hook and then pull back on the gate. The gate will return to the closed and lock position when the gate and latch are released. To maintain the hook in proper working condition, periodically wash in fresh water with mild detergent. Rinse hook thoroughly and allow to dry. Lubricate gate and latch pivot points with a light machine oil. Wipe off all excess oil.

- Use hook in straight pull applications only.
- Ensure gate is properly closed and locked when in use.
- Never place a side load on the hook. This includes secondary attachments or multiple rings/loads, which may cause side loading on any axis of the gate assembly.
- Inspect the hook before and after each use for damage, including cracks, deformation, or improper functioning of the gate and lock mechanisms.

#### **LIFESAVING SYSTEMS CORP.**

220 ELSBERRY RD.  
APOLLO BEACH, FL 33572

PHONE: 813/645-2748

FAX: 813/645-2768

[www.lifesavingsystems.com](http://www.lifesavingsystems.com)