

# 650 Floating Marker Light FML-7




Introducing LSC's newest product, the FML-7, Floating Market Light with a Minimum of 7 candelas per flash in all directions of the upper hemisphere, over twice the required brightness. Brighter and longer operational time than the competition, the water light floats upright in extreme conditions. Constructed of a high strength ASA-Polycarbonate housing, the water light automatically rights itself and activates when thrown overboard. The compact and snag proof design allows for easy storage and quick operational usage. Wide-angle LED emitters produce extreme brightness that is visible omnidirectional 360° for over 3 miles. Two (2) D-Cell batteries power the water light and can be easily and quickly replaced (batteries not included).



The FML-7 is USCG SOLAS Approved (161.110/30/0), is EC/US MRA Approved for use worldwide, and comes complete with a bracket, lanyard, and corrosion-resistant clip that meets all USCG requirements for commercial vessels and US Coast Guard cutters and small boats.  
**Approved for US Coast Guard use IAW MPC D-C-13204**

## 650-FML-7 Features:

- ✓ *Automatically rights and activates in water*
- ✓ *360° Visibility Over 3 Miles (4.8km)*
- ✓ *36 Hours of Operation at Maximum Brightness (Over 30 Days of Operation at a Reduced Brightness)*
- ✓ *Quick and Easy Battery Replacement with Common D-Cell Batteries*
- ✓ *User Replaceable Parts Available for Low Cost of Ownership and Maintenance*
- ✓ *Fully Designed and Assembled in the USA at LSC from 70% LSC Manufactured or US Made Parts.*

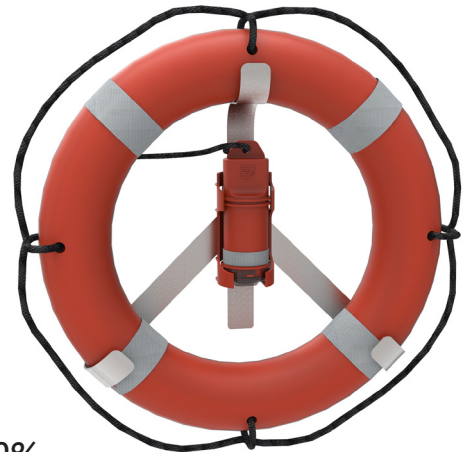

LIFESAVING SYSTEMS CORPORATION

 220 Elsberry Road, Apollo Beach, Florida 33572

 (813)645-2748

 [www.lifesavingsystems.com](http://www.lifesavingsystems.com)



# 650 Floating Marker Light FML-7



650-03



650-11



650-05




650-04




650-02



650-12




650-08

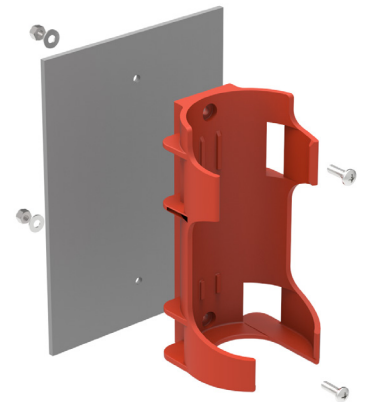

Bracket Mounting Option

## Product Parts:

Part Number	Description
650	FML-7 with Lanyard, Bracket, and Mounting Hardware
650-02	Replacement Lens Assembly
650-03	Replacement Bracket
650-04	Replacement Foam Core
650-05	Replacement Battery Housing
650-08	Replacement O-Ring
650-11	Replacement Lanyard
650-12	Replacement Hardware Kit (3x Bolt, Washer, Nut)
422-D	6pk Rayovac Ultra Pro™ Alkaline D-Cell Batteries



## Technical Specifications:

650 Floating Marker Light	
Light Characteristics	60 Flashes per Minute
Light Duration	36 Hours of Continuous Operation at Maximum Brightness, 30 Days at Reduced Brightness until Batteries are Depleted
Weight	1.8lbs (0.8kg) with 2 D-Cell batteries (not included)
Materials	UV Stable ASA-Polycarbonate Blend
Dimensions	10.5" x 3.25" (26.7cm x 8.25cm)
Approvals	USCG SOLAS 161.110/30/0, EC/US MRA Approved for use worldwide, USCG use Approved IAW MPC D-C-13204
NSN	6230-01-262-1812

LIFESAVING SYSTEMS CORPORATION

220 Elsberry Road, Apollo Beach, Florida 33572

(813)645-2748

[www.lifesavingsystems.com](http://www.lifesavingsystems.com)

